



High output universal HiMid system fitted with a classic 2 x 8" Nd / 1" driver combination. Equally suited as a strong top in combination with a subwoofer or as a stand alone system for speech reproduction over short to medium distances. Four M10 mounting points, and a fifth as an optional alternative to the speaker stand socket, in combination with the comprehensive accessory range, allow simple vertical or horizontal mounting.

PRODUCT SPECIFICATIONS

Speaker Components	2 x 8" Nd / 1"
Description	HiMid Sound System
Power AES / Peak	500 W / 1500 W
Impedance nominal	4 Ω (16 Ω optional)
SPL 1 W / Peak @ 1 m	100 dB / 132 dB
Usable Range	80 Hz - 20 kHz (-6dB)
Tuning Frequency excursion minimum	90 Hz
X - Overpoint acoustical	1,4 kHz
Coverage horizontal / vertical	90° x 60° rotatable
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop through
Handles	1 x
Rigging / Fittings	4 x M10, 2 x M6 35 mm pole mount
Weight	12,5 kg
Size height x width x depth	59,0 x 25,0 x 25,0 cm
Order No.	00240/ II



Front grille version.




Connection panel with Neutrik Speakon connectors on the rear side.



Ergonomically formed handle slot on the rear side for comfortable transport.


DIMENSIONS

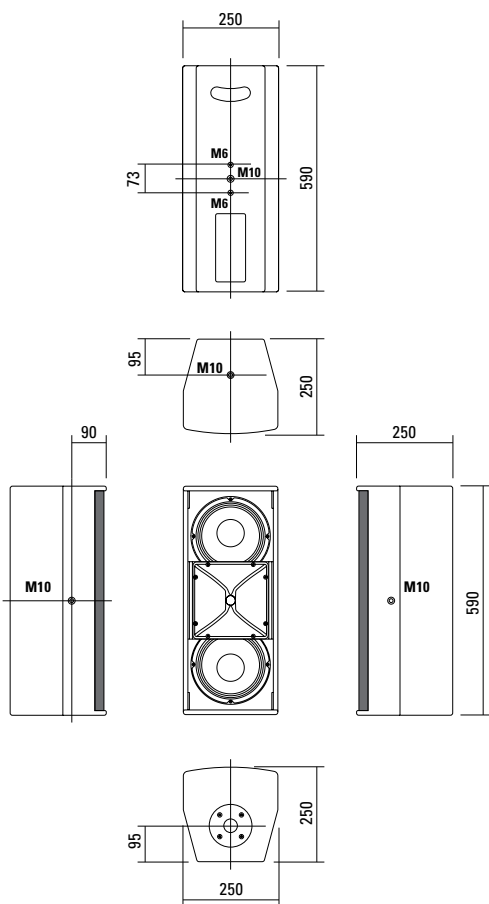

Controller Setups are available on our website:


<http://www.seeburg.net/downloads.php>

Sensitivity 1 W @ 1 m + Impedance

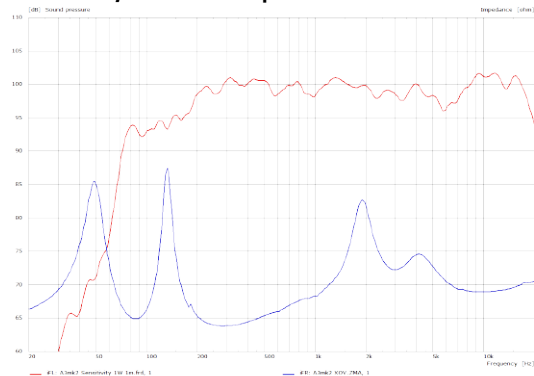


COVERAGE PATTERNS

2D Directivity Plot - horizontal

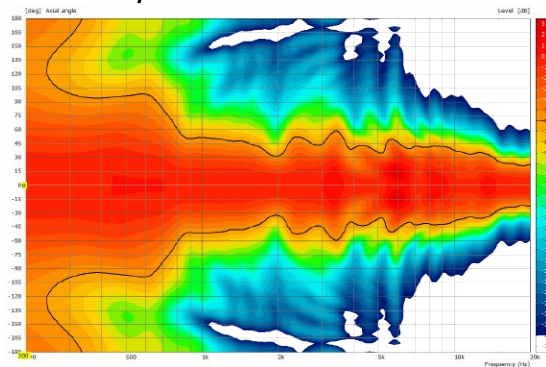

2D Directivity Plot - vertical

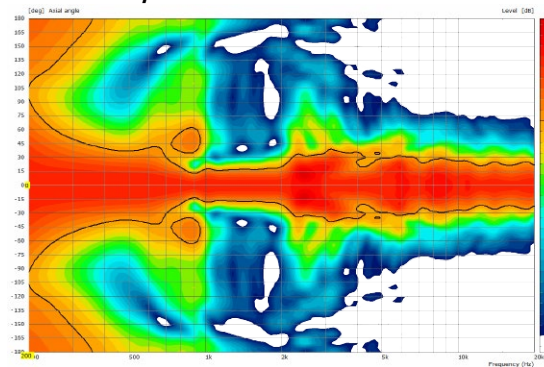

Flying Bracket



for A 3
horizontal alignment, incl. screws
(per unit: 2 pcs. M10 x 20 socket head
screws, spring- and rubber washers)
Order No. **01215/H/set**

Flying Bracket



for A 3
incl. screws
(per unit: 2 pcs. M10 x 20 ergostyle
lobe knob and rubber washers)
Order No. **01215/set**

Ergostyle Lobe Knob



for flying brackets, M10 x20,
with grip, adjustable
Order No. **08171**

Plate



for A 2 / A 3 flying brackets,
horizontal alignment,
replacement for pole mount flange,
110 mm Ø flange with M10 nut
Order No. **08119/M10**

Flange



for flying brackets,
35 mm Ø → M10,
Order No. **08126**

Rubber Washer



for flying brackets,
40 mm
Order No. **01205**

Doughty Trigger Clamp



for flying bracket,
SWL 200 kg
Order No. **01222**

Ring Screw



M10– DIN 580
Order No. **73700**


TV Spigot



10 mm internal thread,
28 mm Ø
Order No. **08128**



Flying Bracket, horizontal



The accessory Spacer allows larger
vertical angles.

Wall Mount



for U-brackets, 40 kg max., incl. screws
(M10 x 70 mm socket head screw,
M10 hex lock nut and flat washer)

for 8"-12" speakers

Order No. **08130/F269**

Wall Mount



for one single A 2 / A 3 / L-Series /
GL 16 / GL 24

Order No. **03034**


Spacer



for Wall Mount (03034),
polyurea coated

Order No. **03034/spc**

Hexagon Grille



for A 3 front grille version,
for replacement, foam behind

Order No. **97006/hex/compl.**

Speaker Stand



Incl. wind up, 50 kg max.,
height 129 to 204 cm, K&M

Order No. **03011**

50 kg max., K&M

Order No. **03010**


Cover



for A 3, padded

Order No. **01258**

Flight Case Trunk



for 2 pcs. A 3 and accessories,
standard, 7 mm birch multiplex,
PVC coated, hinged lid, 2 x recessed
sprung handles, 2 x butterfly catches,
4 x 100 mm blue wheels, 2 pcs. with
brake, rubber feet, partition walls,
interior lined with felt.

Order No. **16066**



Frontgitter-Versionen