

The G Sub 1501 is a particularly flat high-performance subwoofer. With a base measurement of 60 x 60 cm it can also accommodate larger HiMid systems using speaker poles without toppling over. Due to its height of only 40 cm, it can easily be integrated in existing stage constructions. Easy handling, an exclusive and modern design and its deep bass reproduction make it a perfect choice for demanding applications.

PRODUCT SPECIFICATIONS

Speaker Components	15" Nd
Description	Passive Bass Extension
Power AES / Peak	1000 W / 3000 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	100 dB / 135 dB
Usable Range - 6 dB	35 Hz - 220 Hz
Tuning Frequency excursion minimum	42 Hz
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- loop thru, 2 +/- Sub Incl. switch for active / passive operation
Handles	2 x
Rigging / Fittings	M20 on top Wheel board fittings
Weight	26,0 kg (+ 6,0 kg wheel board)
Size height x width x depth	40,0 x 60,0 x 60,0 cm
Order No.	00620



Robust honeycomb type speaker grille. Wheel board fittings.



M20 flange on top.




Connection panel.




DIMENSIONS


MEASUREMENTS

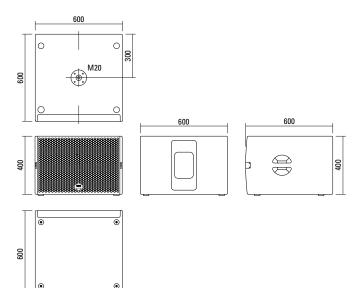

Frequency Response with Presets



Sensitivity 1 W @ 1 m + Impedance



Controller Setups:

600

http://www.seeburg.net/en/downloads

APPLICATIONS



G Sub 1501 / GL 24



2 x G Sub 1501 / 2 x Galeo



G Sub 1501 / TSM 12



2 x G Sub 1501 dp / G Sub 1501 Cardioid set-up.



www.seeburg.com

ACCESSORIES G Sub 1501



Speaker Pole

M20, with wind up, K&M Order No. 03023

M20, adjustable, K&M Order No. 03022



Ceiling Mount for Subwoofer Order No. 08129



for G Sub 1501, stackable, 6 kg Order No. 01267

EEBURG

for G Sub 1501, without wheel board Order No. 01239

Cover



Cover

for G Sub 1501, by using wheel board Order No. 01239/WB



Ceiling Mount.



SEEBURG acoustic line

Wheel Board.

3 G Sub 1501

Fon: +49 (0)7307 97 00-0 Fax: +49 (0)7307 97 00-29

info@seeburg.net www.seeburg.com