



The 18" G Sub is a universal high-performance subwoofer which produces high level, low distortion bass from 32 Hz upwards. The cabinet is designed for long throw and low power compression. A wheel board which mounts to the front of the cabinet for easy transport is available. The G Sub is a flexible and easy to handle tool suitable for many applications.

PRODUCT SPECIFICATIONS

Speaker Components	18" Nd
Description	Passive Bass Extension
Power AES / Peak	1800 W / 5400 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1m	103 dB / 138 dB (1,8 kW version)
Usable Range	32 Hz - 120 Hz (-6 dB)
Tuning Frequency excursion minimum	40 Hz
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- loop thru, 2 +/- Sub
Handles	3 x
Rigging / Fittings	M20 on top and side Wheel board fittings
Weight	43 kg (1,8 kW version) (+ 7 kg wheel board)
Size height x width x depth	69,8 x 51,2 x 68,0 cm
Order No.	00600/1,8 kW



Robust honeycomb grille.




Two large bar handles for easy handling.




Convenient corner handle.

DIMENSIONS

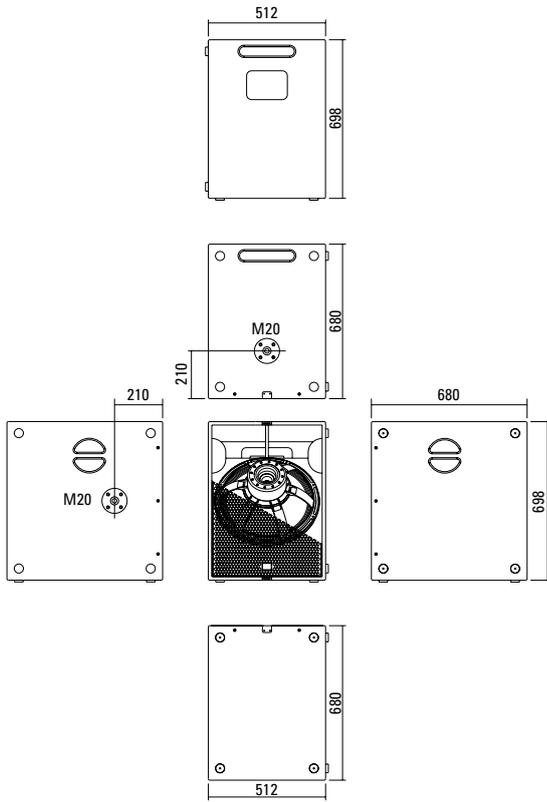


MEASUREMENTS

Frequency Response with Presets

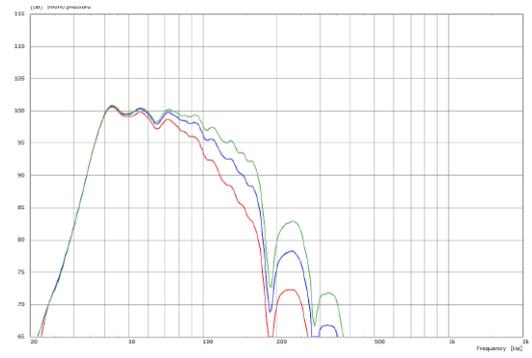

Sensitivity 1 W @ 1 m + Impedance

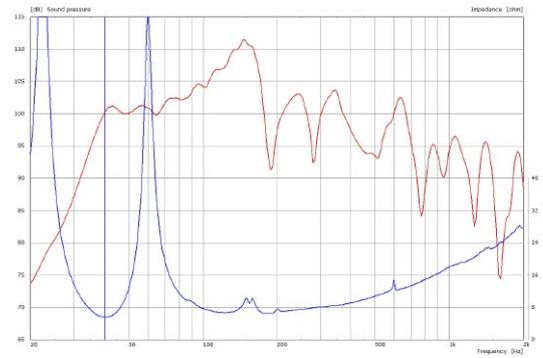

Controller Setups are available on our website:

<http://www.seeburg.net/downloads.php>


APPLICATIONS



2 x G Sub / K 24



G Sub / GL 24

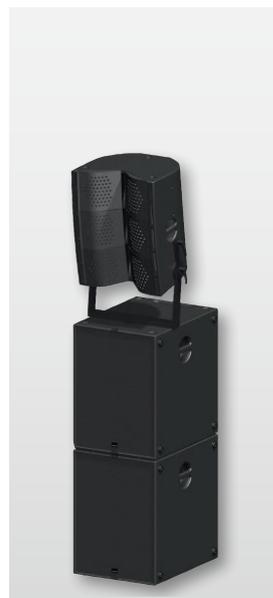

2 x G Sub / G3



G Sub / TSM 12

ACCESSORIES G Sub

Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



Ground Stacking Board

for G Sub / K Sub 1801
with extendable legs

Order No. **01394**



Ceiling Mount

for Subwoofer

Order No. **08129**



Cover

for G Sub, padded

Order No. **01232**



Wheel Board

for G Sub / K Sub 1801,
stackable, 7 kg

Order No. **01260**



Stackable Wheel Board.



Ceiling Mount.