



Passive expansion modules for extended throw or increased vertical coverage angle. With these modules, the GL 16 and GL 24 systems can be better tailored to specific applications and demanding acoustic environments. In standard form, the GL 8 modules are 2-way actively driven. A version with a passive crossover is also available.

PRODUCT SPECIFICATIONS


	GL 8 a	GL 8 xov
Speaker Components	2 x 6,5" Nd / 8 x 1" Nd Tweeter	2 x 6,5" Nd / 8 x 1" Nd Tweeter
Description	Cylindric Wave Radiator	Cylindric Wave Radiator
Power <small>AES / Peak</small>	LF: 200 W / 600 W HF: 75 W / 225 W	200W / 600 W
Impedance <small>nominal</small>	LF: 16 Ω / HF: 16 Ω	16 Ω
SPL <small>1 W / Peak @ 1 m</small>	LF: > 93 dB / 121 dB HF: > 94 dB / 118 dB	> 121 dB
Usable Range	80 Hz - 20 kHz (-6 dB)	80 Hz - 20 kHz (-6 dB)
Tuning Frequency <small>excursion minimum</small>	90 Hz	90 Hz
X - Overpoint <small>acoustical</small>	Depends on preset	1,1 kHz
Coverage <small>horizontal / vertical</small>	100° x 7° (i-version) 100° x 31° (c-version)	100° x 7° (i-version) 100° x 31° (c-version)
Mechanical Splay Angle	0° (i-version) 24° (c-version)	0° (i-version) 24° (c-version)
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HF, 2 +/- LF	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru
Handles	1 x	1 x
Rigging / Fittings	8 x M10 (i-version) 6 x M10 (c-version)	8 x M10 (i-version) 6 x M10 (c-version)
Weight	8,5 kg	9,0 kg
Size <small>height x width x depth</small>	36,2 x 18,9 x 24,5 cm (i-vers.) 38,0 x 18,9 x 25,8 (24,5) cm (c-vers.)	36,2 x 18,9 x 24,5 cm (i-vers.) 38,0 x 18,9 x 25,8 (24,5) cm (c-vers.)
Order No.	00490/i/a (i-version) 00490/c/a (c-version)	00490/i/xov (i-version) 00490/c/xov (c-version)




Einfache Montage der Erweiterungs-module.

DIMENSIONS

GL 8i

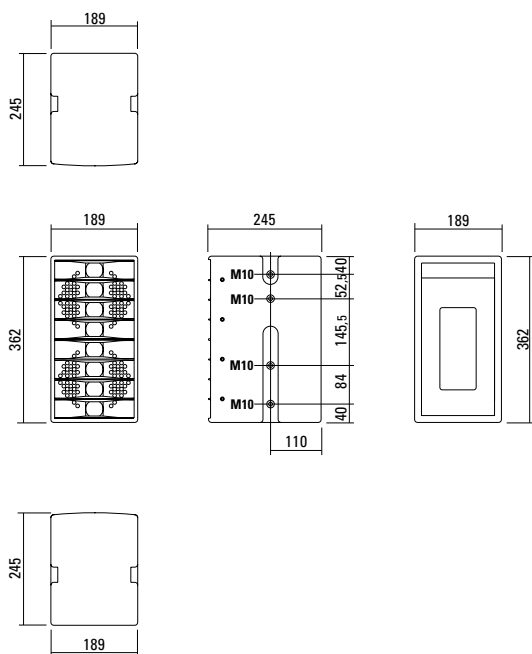

GL 8c

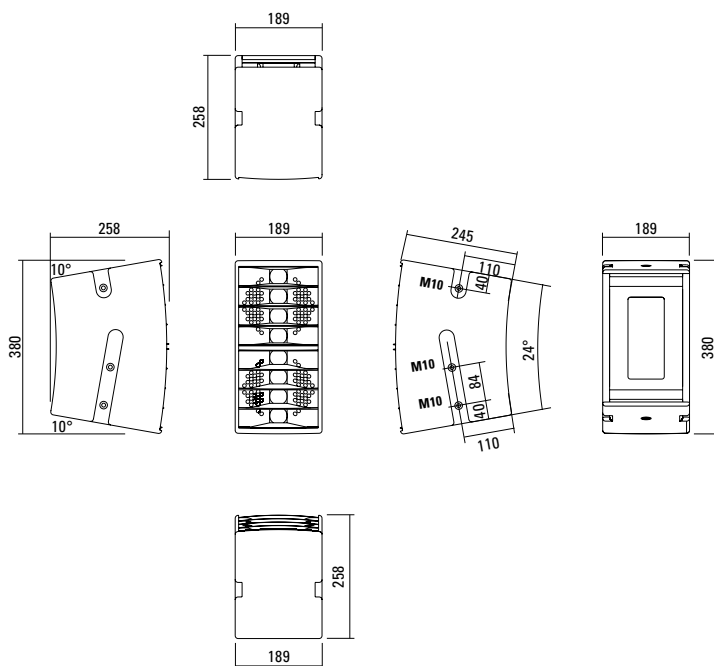


APPLICATIONS



GL 8 i / GL 24



Simple installation of the expansion module.

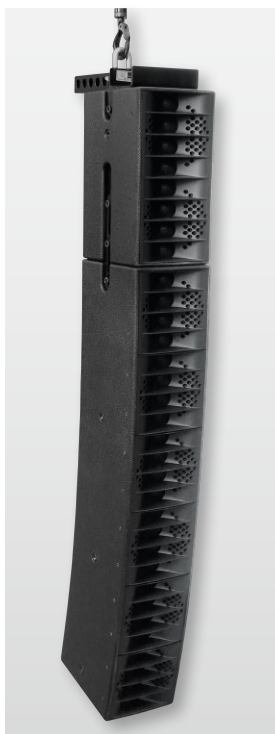

GL 8 i / GL 24



GL 16 c / GL 8 c



GL 8 i / GL 24 j

ACCESSORIES GL 8

Flying Cradle




for one unit GL 24 or
for up to 6 units GL 16
Order No. **01354**

Shackle



for GL-flying cradle,
WLL 1000 kg
Order No. **01372/GL**

Connection Bar



GL 24 standard version → GL 8c
for Downfill,
a pair, incl. accessories
Order No. **08159**