

# Passive Bass Extension **TSM Sub**

The TSM Sub is a high-power universal subwoofer. The 15" Neodymium driver provides accurate and efficient bass reproduction over a wide frequency range. An integrated switchable passive crossover allows the TSM Sub to be used either in conjunction with an external active crossover, or as part of a passive 2 way system.



## PRODUCT SPECIFICATIONS

<b>Speaker Components</b>	15" Nd
<b>Description</b>	Passive Bass Extension
<b>Power</b> AES / Peak	500 W / 1500 W
<b>Impedance</b> nominal	8 Ω
<b>SPL</b> 1 W / Peak @ 1 m	99 dB / 131 dB
<b>Usable Range</b>	35 Hz - 220 Hz (-6 dB)
<b>Tuning Frequency</b> excursion minimum	42 Hz
<b>Connectors</b>	2 x Neutrik Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub Incl. switcher for active / passive operation
<b>Handles</b>	2 x
<b>Rigging / Fittings</b>	M20 on top Wheel board fittings
<b>Weight</b>	24 kg (+ 6 kg wheel board)
<b>Size</b> height x width x depth	51,5 x 47,0 x 56,0 cm
<b>Order No.</b>	<b>00974</b>



Removable wheel board for simple transportation.




Two large bar handles for easy handling.



M20 flange on top.

## DIMENSIONS

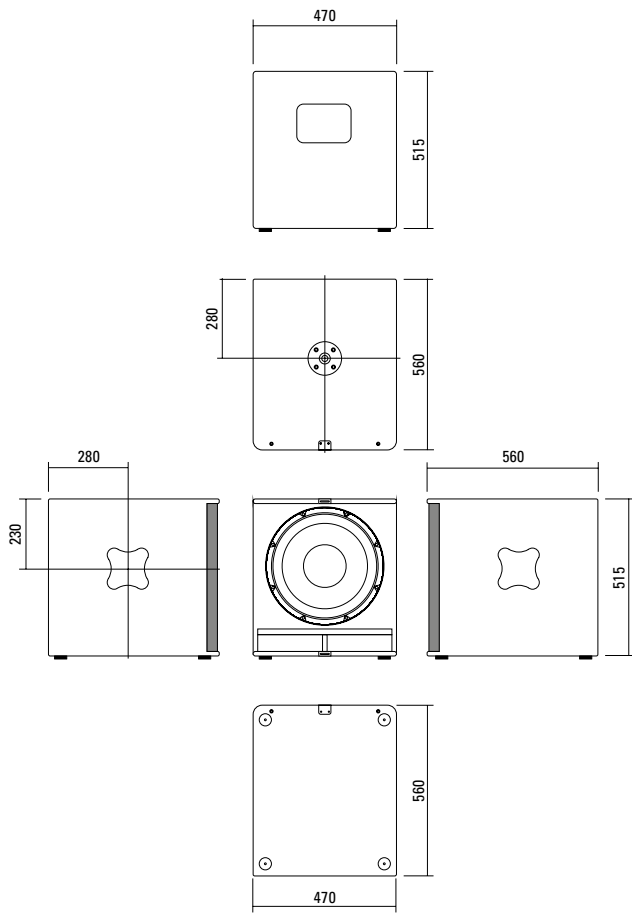


Controller Setups finden Sie unter:


<http://www.seeburg.net/de/downloads>

## MEASUREMENTS

### Presets - Frequency Response

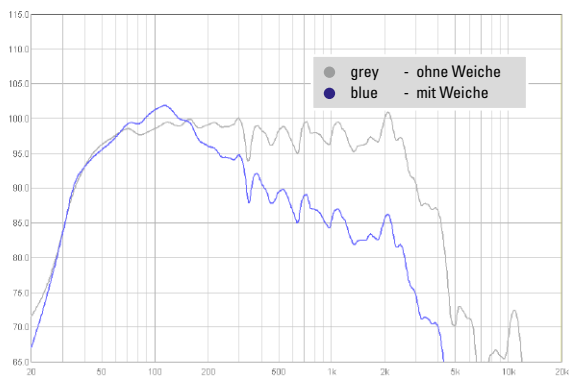

### Impedance

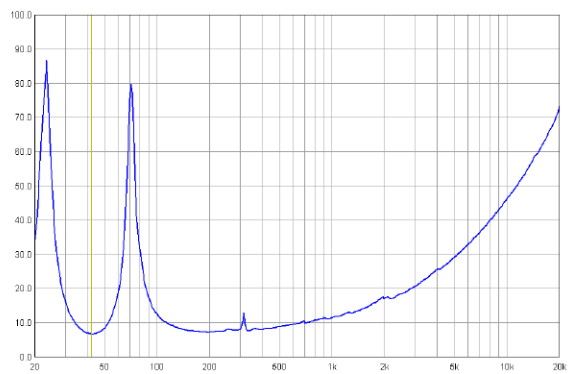

## ACCESSORIES TSM Sub

### Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M



Order No. **03022**



### Flight Case

for 1 x TSM Sub, standard,  
7 mm birch multiplex, PVC coated,  
4 x recessed sprung handles,  
4 x butterfly catches, 4 x 100 mm  
blue wheels, 2 pcs. with brake,  
interior lined with felt

Order No. **16048**



### Cover

for TSM Sub (all types)  
without wheel board

Order No. **01247**



for TSM Sub (all types)  
with wheel board

Order No. **01246**



### Wheel Board

for TSM Sub, stackable, 6 kg

Order No. **01265**



Stackable wheel board.