



SLIMBASS WALL[®]

TUNED ABSORPTION PANEL



Image of 120x60 model Ref. SLW120 (on the left) and Ref. SLW120 applied (ambient image)


DESCRIPTION

Like the SLIMBASS Angle, the SLIMBASS Wall is an absorbent panel of low frequencies to be used on walls or ceilings. Music rooms, studios, rehearsal rooms, etc., require this type of materials which are efficient at absorbing low-frequency sound. This model is made of self-extinguishable M1 fire retardant acoustic foam, with a wooden-like synthetic PVC finish membrane. The resonance box that was created inside the SLIMBASS Wall optimises the range of sound absorption at 125 Hz. This model has an elegant and attractive design with the comfort that wood provides. It can be aesthetically combined with its counterpart, the SLIMBASS Angle, which is meant to be mounted on 90° corners. This product aims to reduce the acoustic anomalies caused by the excess of low and medium-low frequencies. It is directly glued to the existing surfaces.

FEATURES

- NRC average: 0.60 / m² [$>100\text{Hz}; <5\text{KHz}$].
- Self-extinguishable M1 fire-retardant acoustic foam.
- Very easy to install.
- Other colours available upon consultation.


TECHNICAL DRAWINGS



MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
SLW120	120 cm	60 cm	12 cm	2.8 Kg

ABSORPTION COEFFICIENT

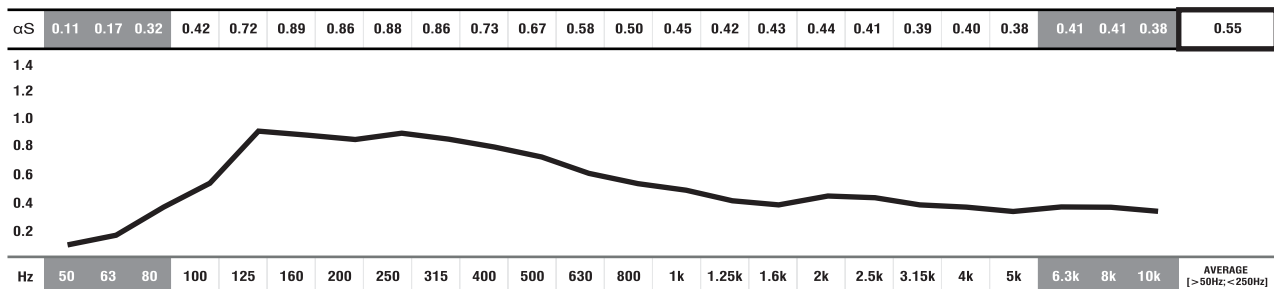

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

MELAMIN FACED BOARD FINISHINGS



REGULAR FOAM COLOURS



IMPORTANT NOTICES

- JOCAVI[®] accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Due to its natural origin, wood-based products will always present natural imperfections inherent to the organic nature. And for similar reasons, they will also present traces of old-age in the course of time.
- Wood and Fabric products are highly susceptible to change its appearance with humidity and temperature. Close attention must be paid to the storage conditions and the acclimatization before, during and after the installation.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI[®] products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.