



AB TWICE®

ABSORBENT PANEL



Image of 120x60cm model Ref.:ABT120 (on the left) and Ref.:ABT120 applied (ambient image).

DESCRIPTION

The AB Twice® is an acoustic treatment absorber made of self-extinguishing acoustic foam. Each model has an angular arc-shaped geometry that describes five mountains within a concept of three-dimensional geometry.

The finish of this model is of the utmost quality. Its soft finish layer improves its acoustic performance and provides a fine and "smooth like velvet" appearance. The velvet finish gives this product a distinctive feeling of comfort.

A combination of several modules makes this acoustic solution very attractive with a harmonised look.

The creation of surfaces that are efficient at absorbing sound waves becomes imperative, and that is the main feature that makes this product so relevant. This panel is meant to absorb mid-low to high range frequencies.


The AB Twice® is perfect to cover continuous areas of walls or ceilings as a coating material and can be used as a soundproofing reinforcement as well.

It is ideal for commercial areas, television studios, pavilions, auditoriums, meeting rooms, public spaces, etc., that need specific care regarding airborne noise control.

FEATURES

- **FINISHINGS AVAILABLE:** Regular Foam or the Velvety Finishing.
- **NRC:** 0.87/m² (>250Hz; <10KHz).
- **ACOUSTIC FOAM** - Flame resistance: Euroclass B-s3,d1 (similar to old M1).
- Shape and design recommended for continuous surface treatment.
- Very easy to install.
- Standard Dimensions: 120x60x11cm.
- Sold in pairs.

TECHNICAL DRAWINGS

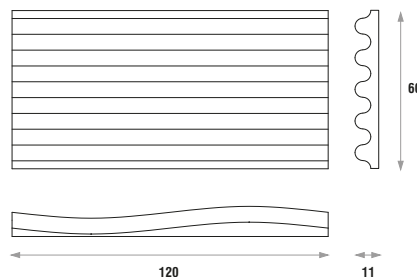


MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
ABT120	120cm	60 cm	5/11 cm	0.8 Kg

SOLD IN PAIRS


ABSORPTION COEFFICIENT

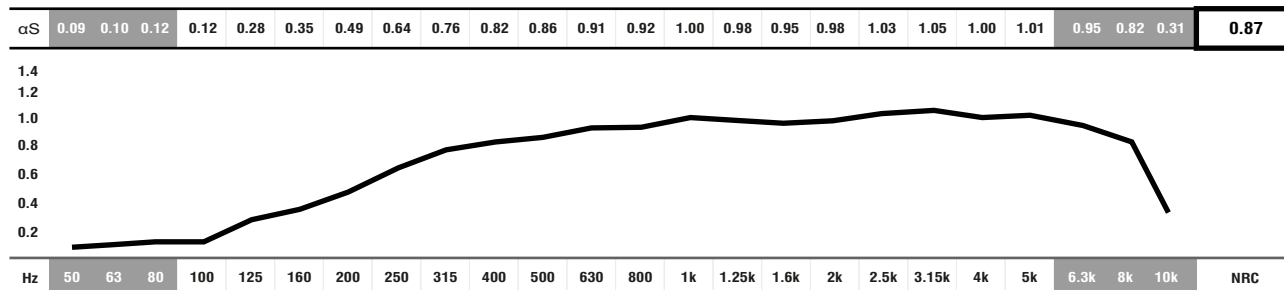

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [<100Hz and > 5K] are Non Standard Values.

REGULAR FOAM COLOURS

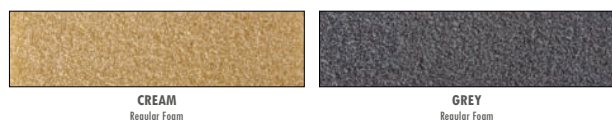

VELVETY COLOURS



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.