



BASSWEAKNER®

TUNED ABSORPTION PANEL

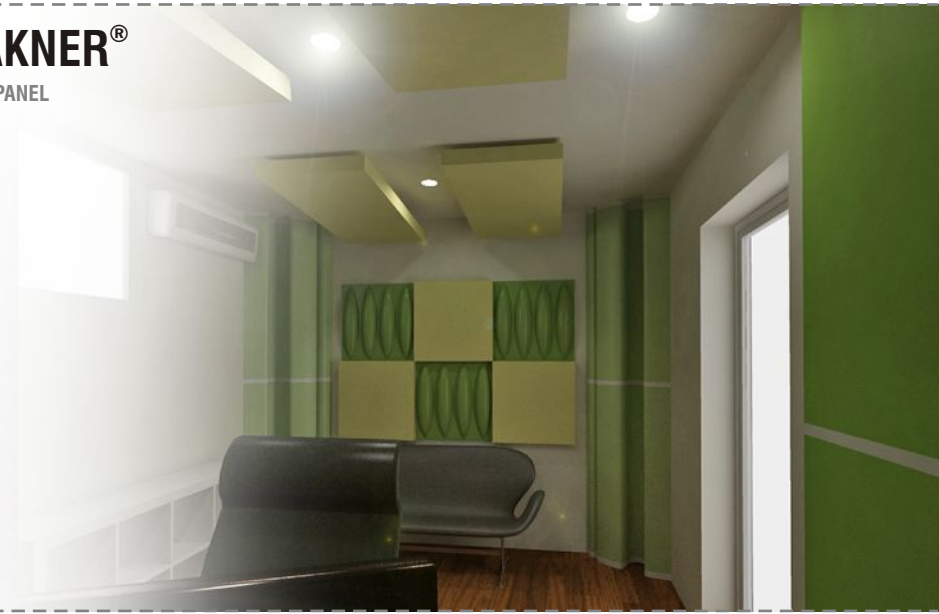


Image of 120x50cm model Ref.:BWK120 (on the left) and Ref.:BWK120 applied (ambient image).

DESCRIPTION

The corners of rooms are usually places with high incidence of low frequencies. Usually free of furniture, acoustic treatment is a priority in corners.


This absorption panel of medium-low frequencies has been specifically designed to be placed in the corners of rooms, but it can also be placed on the horizontal edges at 90°.

The attractive shape of the BASSWEAKNER® is due to its two curved-line recesses, which greatly increase the exposed absorbent surface and create two chambers that help retain energy. To manufacture this model, ATP® has updated the raw material to high-density EPS. The installation is done in a simple manner by using our special glues. This product can also be easily cut to fit when it is being installed. It is available in several colours.

FEATURES

- Average absorption: 0.59/m² [$>100\text{Hz}$; $<250\text{Hz}$].
- EPS Fire Reaction: Euroclass E (NP EN 13501-1).
- Package: 2 units.
- Very easy to install.
- Other colours available upon consultation.


TECHNICAL DRAWINGS



MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
BWK120	120 cm	40 cm	50 cm	8 Kg


ABSORPTION COEFFICIENT

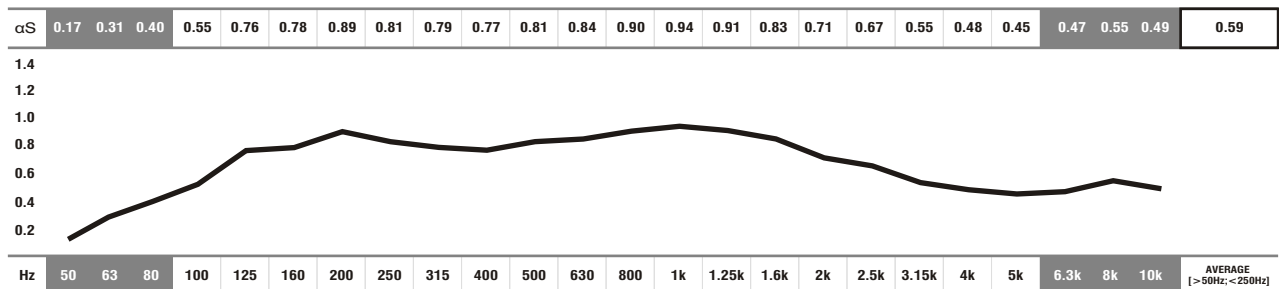

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

STANDARD PROJECTABLE CELLULOSE FINISHING COLOURS

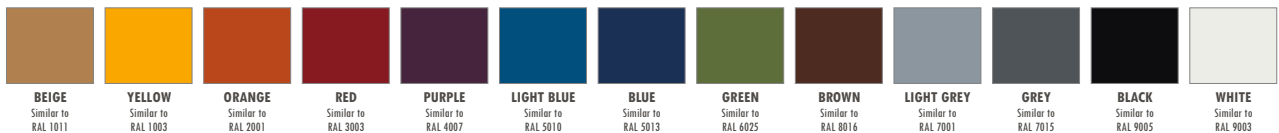

IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL® is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.