



FOAMSORB® /INVERTED

ABSORBENT PANEL



Image of 60x60cm models Ref.:FSO060 and Ref.:FSI060 (on the left) and Ref.:FSO060 and Ref.:FSI060 applied (ambient image).

DESCRIPTION


The FOAMSORB INV® absorption panels are ATP® registered products and the real mid-range absorbers from our collection. They are made of high-quality controlled-cell, self-extinguishable M1 fire-retardant acoustic foam.

The FOAMSORB INV® panels present a unique and elegant design; the male and female pieces help solve many of the rooms' acoustic anomalies.

These panels have a high absorption coefficient in the broad range of the sound spectrum, and are significantly efficient at absorbing medium-low frequencies.

In general terms, they work well on flat walls and ceilings. They can be combined with the WAVYFUSER INV® diffusion panels, which have the same shape, thus giving music rooms a truly balanced continuous acoustic treatment surface and a fine-looking design.

TECHNICAL DRAWINGS

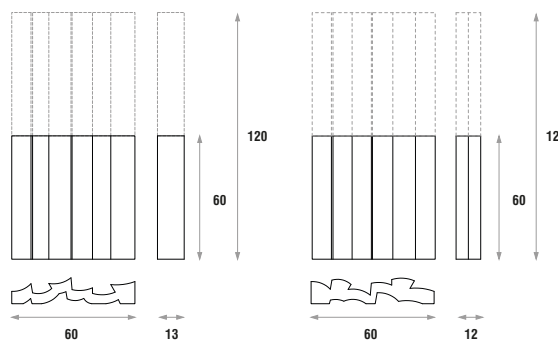

FEATURES


- Raw material: Melamine Foam or Regular Acoustic Foam.
- NRC: **0.95/m²** [$>250\text{Hz}; <10\text{KHz}$].
- **MELAMINE FOAM** - Flame resistance: Euroclass B-s1,d0 (similar to old M1 France, Germany B1,GB class1, USA V0/HF1).
- **ACOUSTIC FOAM** - Flame resistance: Euroclass B-s3,d1 (similar to old M1).
- Great decorative alternatives.
- Sold in pairs.

MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
FSO/1120	120 cm	60 cm	13/12 cm	1.2 Kg
FSO/1060	60 cm	60 cm	13/12 cm	0.6 Kg

SOLD IN PAIRS

ABSORPTION COEFFICIENT

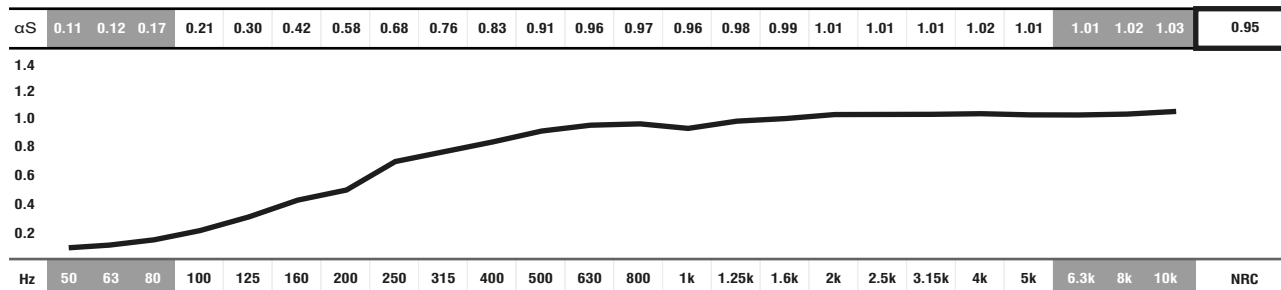

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

REGULAR AND MELAMINE FOAM COLOURS




CREAM
Regular Foam



GREY
Regular Foam



LIGHT GREY
Melamine Foam



WHITE
Melamine Foam

IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range. Close attention must be paid to the storage conditions and the acclimatization before, during and after the installation.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.

