



LF CAMOU[®]

TUNED ABSORPTION PANEL



Image of 60x60cm model Ref.:LFA060 (on the left) and Ref.:LFA120 applied (ambient image).

DESCRIPTION

The LF CAMOU[®] is a low-frequency absorption panel suitable for applying in the 90° corners of rooms. The absorption peak of this panel is at 100 Hz. It combines a high-density foam box with JOCAVI[®]'s fabric finishing. It has exactly the same finishing as the CAMOU[®] absorbent panel, so we can combine the two models with the same aesthetics. The combined use with CAMOU[®] will increase the absorption of the nearest harmonic frequencies.


The closed resonance chamber has sufficient mass and density to provide a very concentrated and effective absorption coefficient. This panel will become one of the most efficient and inexpensive offers in the market for low-frequency absorbent materials.

This panel is mounted by pasting it with our recommended adhesive glue.

The LF CAMOU[®] is designed to fit and match the CAMOU[®] or any other 80mm thickness models.

In order to boost bass absorption, we recommend that you use a number of panels enough to fill all the edge corners of the room.

TECHNICAL DRAWINGS

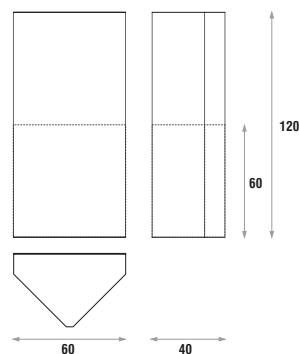


FEATURES

- Made up of high-density PU foam and Fabric finishing plate.
- Average absorption: **0.77/m²** (>63Hz; <500Hz).
- Tuned to 100 Hz.
- Fire-resistance: Fabric - Euroclass B (similar to old M1); HD PU Foam Euroclass B-s3,d1 (similar to old M1).
- Designed to fit and match any 80mm thickness models.
- Very easy to install.

MODELS AND SIZES

| MODELS | HEIGHT | WIDTH | DEPTH | WEIGHT |
|--------|--------|-------|-------|--------|
| LFA120 | 120 cm | 40 cm | 40 cm | 8.8 Kg |
| LFA060 | 60 cm | 40 cm | 40 cm | 4.4 Kg |


ABSORPTION COEFFICIENT

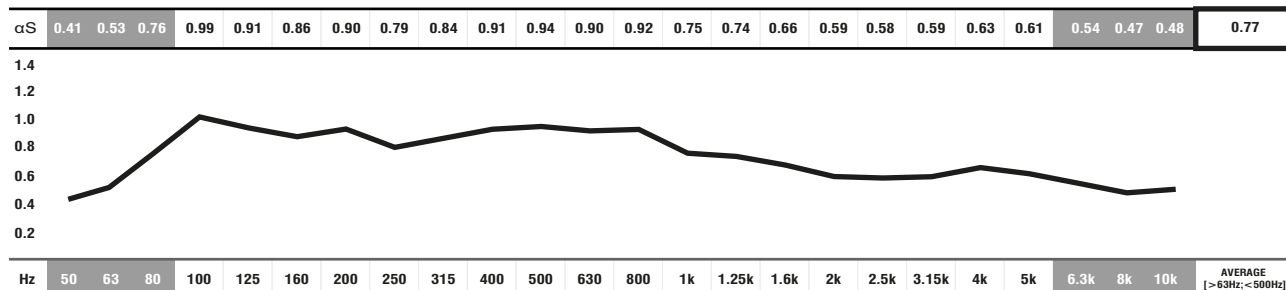

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [<100Hz and > 5K] are Non Standard Values.

STANDARD FABRIC COLOURS

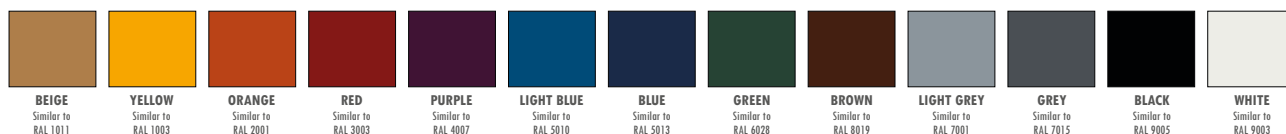

IMPORTANT NOTICES

- JOCAVI[®] accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL[®] is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI[®] products' range.
- Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.