



# BASSKEEPER WALL®

TUNED ABSORPTION PANEL

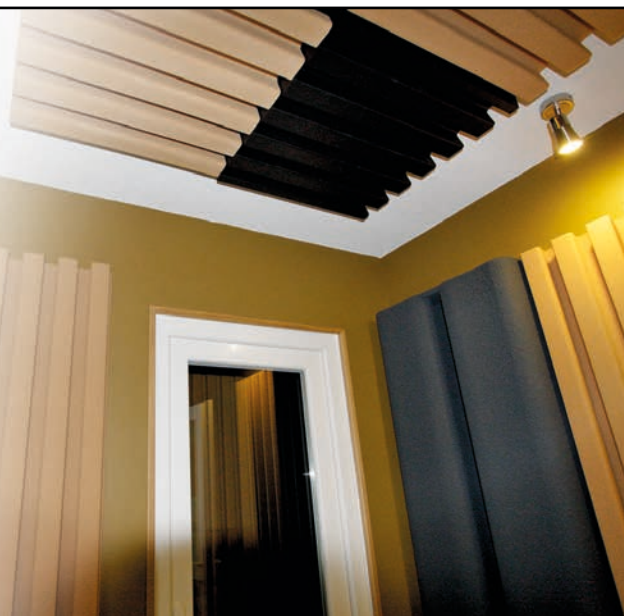


Image of 120x60cm model Ref.:BKW120 (on the left) and Ref.:BKW120 applied (ambient image).

## DESCRIPTION

The BASSKEEPER WALL® is the ATP® solution for the absorption of low frequencies and it is meant to be mounted on walls and ceilings.


When combined with the BASSKEEPER ANGLE®, it provides the best ATP® choice among the low-frequency products.

This bass trap is an open resonance box model, tuned to 160 Hz, like the BASSKEEPER ANGLE®, and you can match them. These two products together provide a true linear tool and a first-class approach to tame low frequencies and take perfect control of the basses.

In most situations, these two models combined solve most problems caused by the excess of low frequencies in the room.

Several colours are at your disposal.

## TECHNICAL DRAWINGS

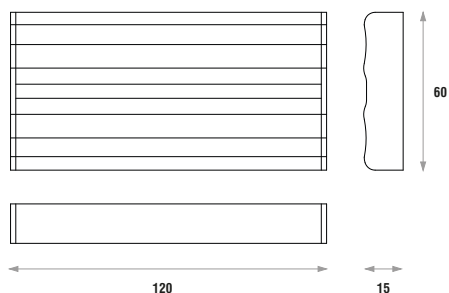


## FEATURES

- Raw material: HD EPS with Coloured Projectable Cellulose Finishing.
- Average absorption: **0.66/m<sup>2</sup>** [ $>100\text{Hz}; <250\text{Hz}$ ].
- Fire-resistance: Projectable Cellulose - Euroclass A2-s1,d0 (similar to old M0); EPS - Euroclass B-s3,d1 (similar to old M1).
- Very easy to install.
- Other colours available upon consultation.

## MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
BKW120	120 cm	60 cm	15 cm	3.1 Kg


## ABSORPTION COEFFICIENT

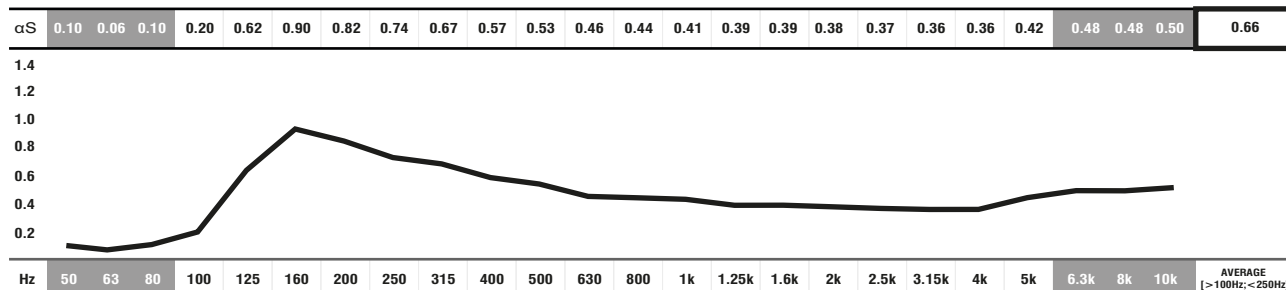

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [ $<100\text{Hz}$  and  $>5\text{K}$ ] are Non Standard Values.

## STANDARD PROJECTABLE CELLULOSE FINISHING COLOURS

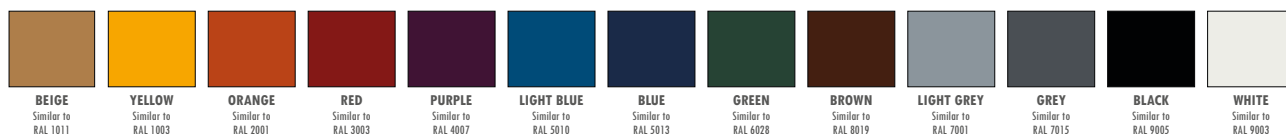

## IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL® is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.