



The G Sub 1201 is a particularly flat high-performance 12" subwoofer. With its large footprint it can accommodate GL- and other HiMid systems using speaker poles without toppling over. Easy handling, an exclusive and modern design and its deep bass reproduction make it a perfect choice for demanding applications.

PRODUCT SPECIFICATIONS


| | |
|---|---|
| Speaker Components | 12" Nd |
| Description | Passive Bass Extension |
| Power AES / Peak | 500 W / 1500 W |
| Impedance nominal | 8 Ω |
| SPL 1 W / Peak @ 1 m | 95 dB / 126 dB |
| Usable Range - | 38 Hz - 220 Hz (- 6 dB) |
| Tuning Frequency excursion minimum | 47 Hz |
| Connectors | 2 x Neutrik Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub Incl. Switcher for active / passive operation |
| Handles | 2 x |
| Rigging / Fittings | M20 on top |
| Weight | 17 kg |
| Size height x width x depth | 33,0 x 48,5 x 48,5 cm |
| Order No. | 00610 |



Rubber Surround for large excursion.




Connection panel.



Comfortable handles for easy transport.

DIMENSIONS

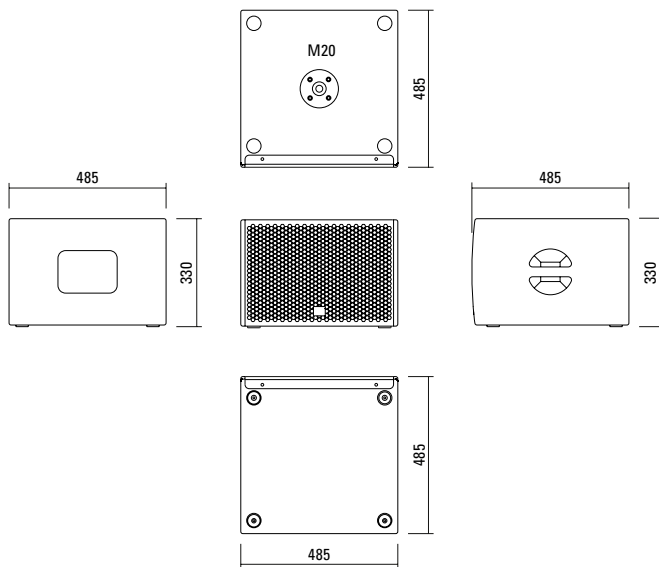


Controller Setups finden Sie unter:


<http://www.seeburg.net/downloads.php>

MEASUREMENTS

Frequency Response with Presets

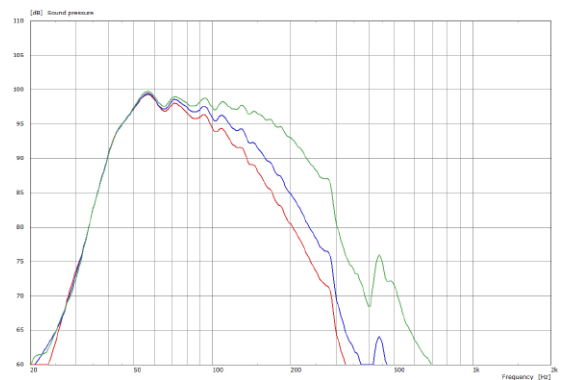

Sensitivity 1 W @ 1 m + Impedance

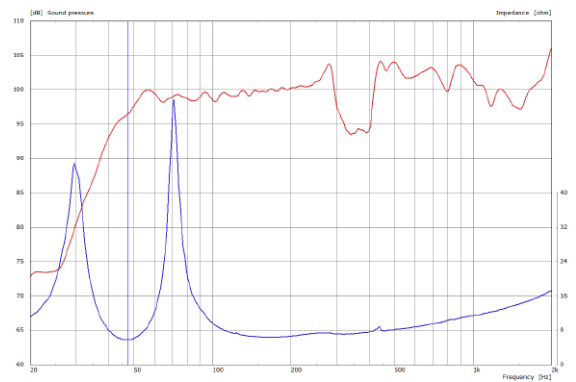

APPLICATIONS




G Sub 1201 / GL 16i



G Sub 1201 / L 16j



G Sub 1201 / TSM 8

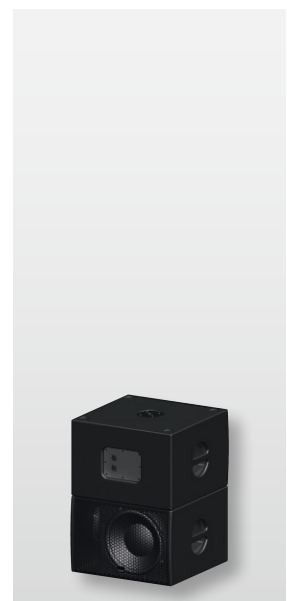

G Sub 1201 dp+ / G Sub 1201 (n.h.)
Cardiod set-up

ACCESSORIES G Sub 1201

Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



Ceiling Mount

for Subwoofer

Order No. **08129**



Cover

for G Sub 1201, padded

Order No. **01237**



Ceiling mount.