



The G Sub 1001 is a compact, high powered 10" subwoofer with a particularly low-profile form. The modern design and high power-handling capabilities make the G Sub 1001 particularly interesting for applications requiring precise bass reproduction and very unobtrusive installation.

PRODUCT SPECIFICATIONS

Speaker Components	10"
Description	Passive Bass Extension
Power AES / Peak	350 W / 1100 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	97 dB / 128 dB
Usable Range - 6 dB	44 Hz - 300 Hz
Tuning Frequency excursion minimum	53 Hz
Connectors	2 x Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub 1 x Speakon NL4MP in/out Coding: 1+/- Sub, 2+/- loop thru
Handles	1 x
Rigging / Fittings	M20 on top
Weight	17,0 kg
Size height x width x depth	28,0 x 43,0 x 43,0 cm
Order No.	00605




M20 flange on top.



Comfortable handles for easy transport.



DIMENSIONS

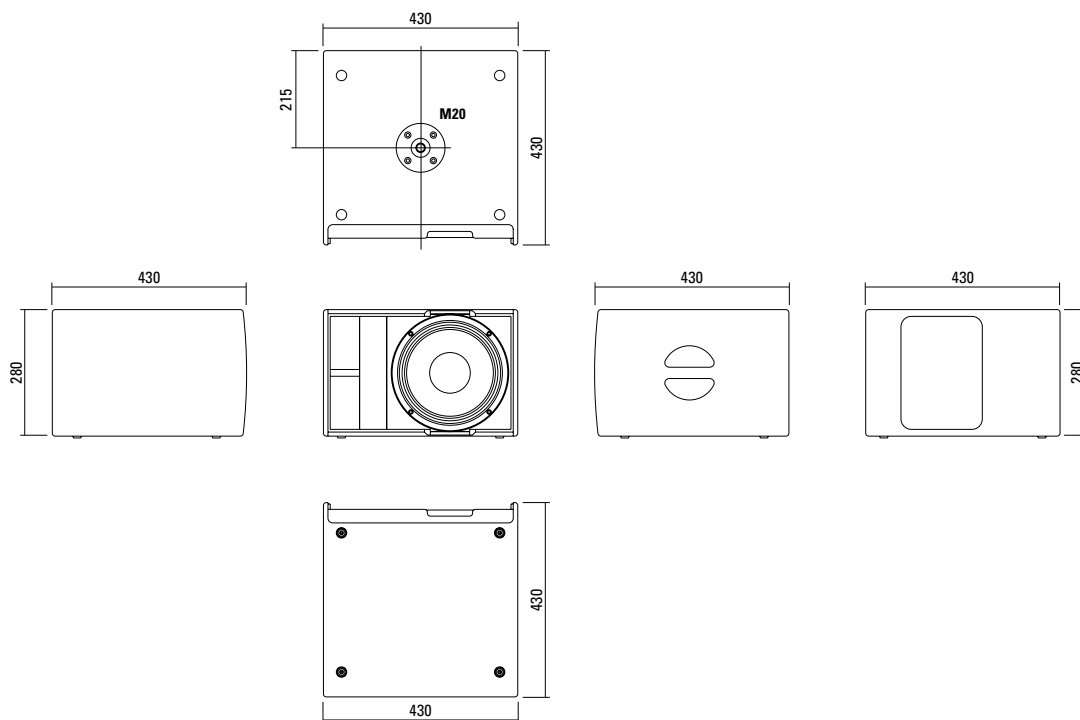


Controller Setups:


<http://www.seeburg.net/en/downloads>

MEASUREMENTS

Frequency Response with Presets

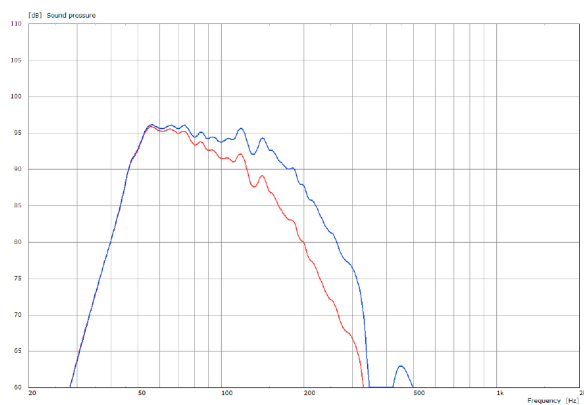

Sensitivity 1 W @ 1 m + Impedance

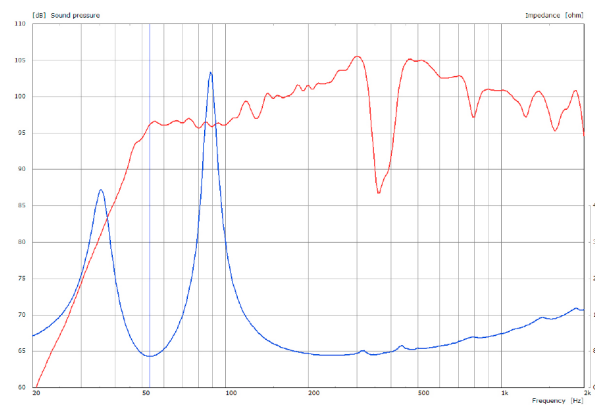

ACCESSORIES G Sub 1001

Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



Wall Mount

bar: 269 mm, max. load 40 kg,
incl. (M10 x 70 mm socket head screw,
M10 hex lock nut and flat washer)

Order No. **08130/F/269/w** (RAL 9010)

Order No. **08130/F/269**



Ceiling Mount

for Subwoofer,
2 parts, incl. screws

Order No. **08129**

Order No. **08129/w** (RAL 9010)



MultiRigg™ light

version for fixed installations,
for horizontal and vertical alignment,
incl. accessories (2 x M10 x 20 socket
head screws), max. load 50 kg

Order No. **01362**



Cover

for G Sub 1001, padded

Order No. **01226**



G Sub 1001 / X 1

