

Multifunctional Coaxial Sound System **X1**




Multifunctional premium-class compact 2-way system. The coaxial configuration in combination with a carefully designed large-area horn ensures absolutely constant response even off the main axis. High-power Neodym drivers and long-excursion coils provide high efficiency and reduced distortion. Four M10 threaded mounting points are available to mount accessories for installation or mobile applications.

PRODUCT SPECIFICATIONS

Speaker Components	6,5" Nd (2" VC) / 1" Nd (1,7" VC)
Description	Multifunctional Coaxial Sound System
Power AES / Peak	200 W / 600 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	92 dB / 120 dB
Usable Range	80 Hz - 19 kHz (-6 dB)
Tuning Frequency excursion minimum	90 Hz
X - Overpoint acoustical	1,9 kHz
Coverage horizontal / vertical	90° x 60° - rotatable
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru
Rigging / Fittings	4 x M10
Weight	5,5 kg
Size height x width x depth	31,0 x 20,0 x 22,0 cm
Order No.	01090



DIMENSIONS

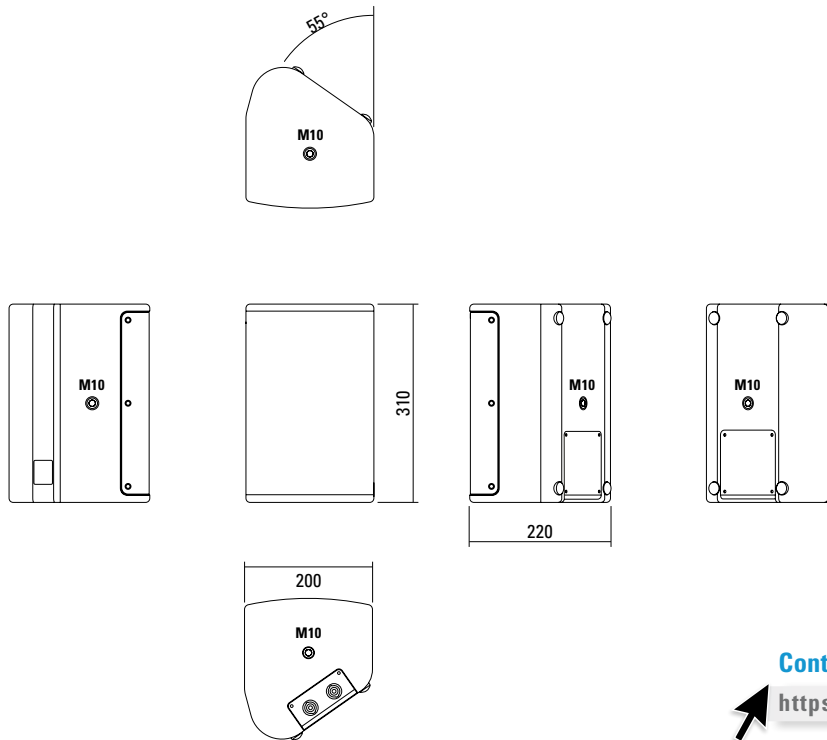


Controller Setups:


<https://www.seeburg.net/en/downloads>

MEASUREMENTS


2D Directivity Plot - horizontal

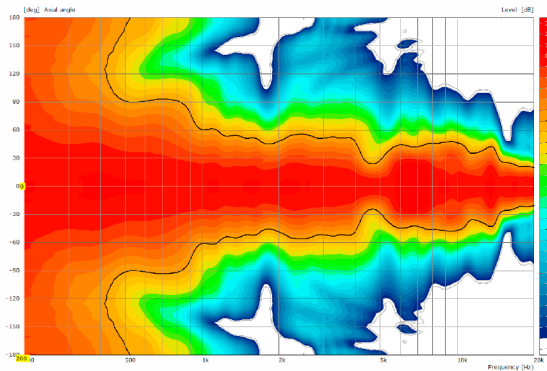


Sensitivity 1 W @ 1 m + Impedance

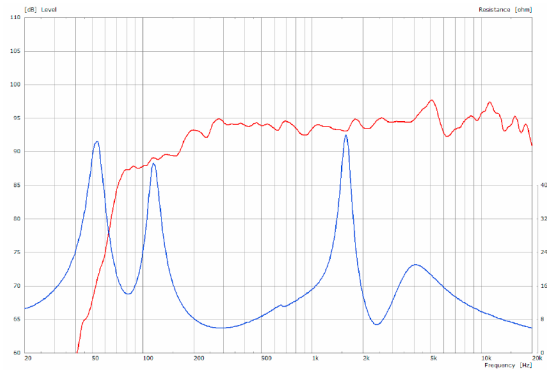

2D Directivity Plot - vertical

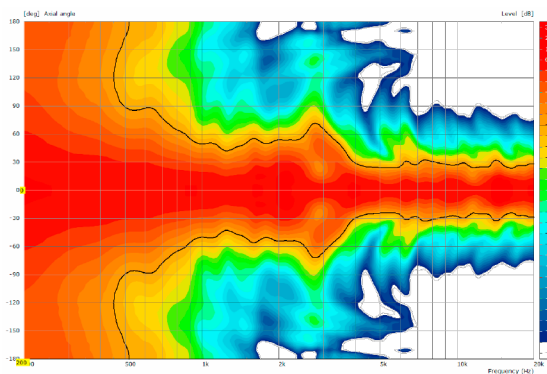

Frequency Response with Presets

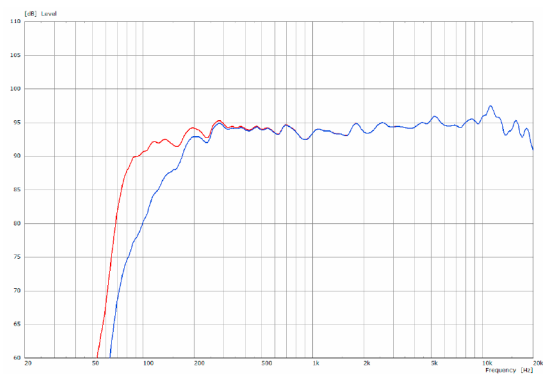

ACCESSORIES X 1

Flying J-Bracket



for A 1 / TS Nano / X 1
horizontal and vertical alignment,
incl. screws
(per unit: 1 pcs. M10 x 20 adjustable
handle screws and flat)
Order No. **01212/J/set**

Handle Screw



for flying brackets,
adjustable
M10 x 20
Order No. **08375/20**

Flange



with ball and socket joint,
with additional locking screw,
M10 x 15, max. load 15 kg
Order No. **08125**

Flange



35 mm Ø → M10,
Order No. **08126**

Truss Clamp



incl. M10 Adapter,
max. load 15 kg
Order No. **01221**

Ring Screw



M10– DIN 580
Order No. **73700**

Steel Safety



4 mm x 600 mm, black,
max. load 10 kg (BGI 810-3),
quick connector undetachably
Order No. **01376/4**

Wall Mount



M10, max. load 15 kg, with stargrip
Order No. **08131**
Order No. **08131/w** (white)

For permanent installation,
incl. tilt angle stop
Order No. **08131/F**
Order No. **08131/F/w** (white)

Bag



for 2 x A 1 / 2 x TS Nano / 2 x X 1,
padded with pocket for accessories
Order No. **01249**