





High class full range system with a precise, symmetrical dispersion and long throw. The F 8 is a 2 way active controller driven system which is fitted with 15" / 1.4" drivers. Especially suited to permanent installations in auditoriums and multi-function venues. The F 8 is also available in the xov passive version.

PRODUCT SPECIFICATIONS


| | F 8 a | F 8 xov |
|--|--|--|
| Speaker Components | 15" Nd/ 1,4" Nd | 15" Nd/ 1,4" Nd |
| Description | Fullrange Sound System | Fullrange Sound System |
| Power <small>AES / Peak</small> | LF: 500 W / 1500 W HF: 80 W / 240 W | 500 W / 1500 W |
| Impedance <small>nominal</small> | LF: 8 Ω / HF: 8 Ω | 8 Ω |
| SPL <small>1 W / Peak @ 1 m</small> | LF: 99 dB / 129 dB HF: 110 dB / 138 dB | 99 dB / 132 dB |
| Usable Range | 50 Hz - 18 kHz (- 6 dB) | 50 Hz - 18 kHz (- 6 dB) |
| Tuning Frequency <small>excursion minimum</small> | 48 Hz | 48 Hz |
| X-Overpoint <small>acoustical</small> | Depends on preset | 850 Hz |
| Coverage <small>horizontal / vertical</small> | 60° x 50° | 60° x 50° |
| Max. Splay Angle | --- | --- |
| Connectors | 2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HF, 2 +/- LF | 2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru |
| Handles | --- | --- |
| Rigging / Fittings | 3 x M10 / 4 x M8 | 3 x M10 / 4 x M8 |
| Weight | 25 kg | 26 kg |
| Size <small>height x width x depth</small> | 80,0 x 45,0 x 41,0 cm | 80,0 x 45,0 x 41,0 cm |
| Order No. | 00350/a | 00350/xov |

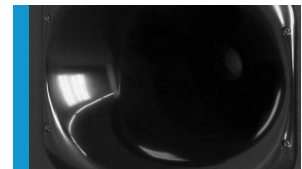


High precision 60° x 50°- Horn.



Water resistant coated diaphragm.



DIMENSIONS

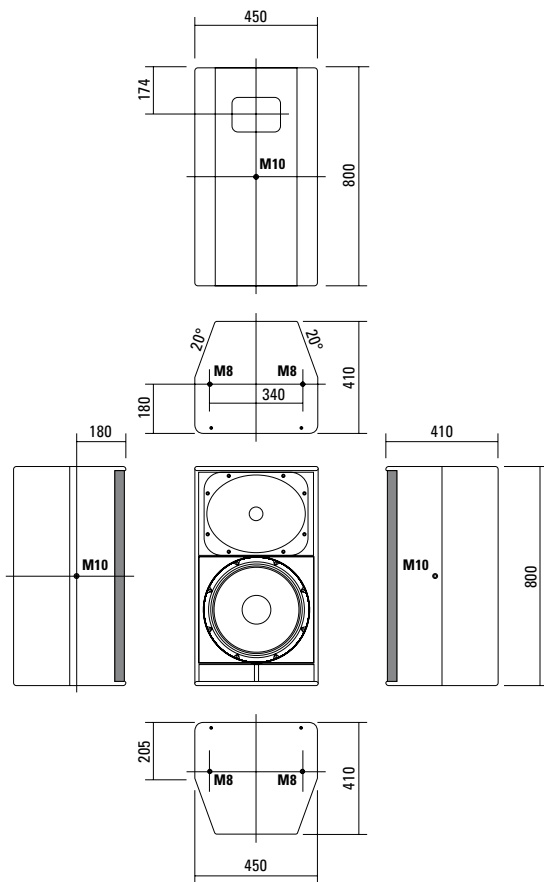


Controller Setups are available on our website:


<http://www.seeburg.net/downloads.php>

COVERAGE PATTERNS

2D Directivity Plot - horizontal

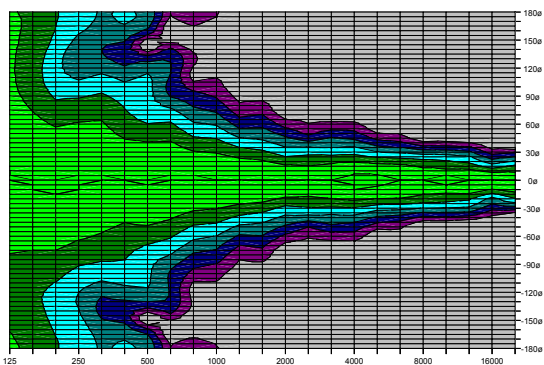

2D Directivity Plot - vertical

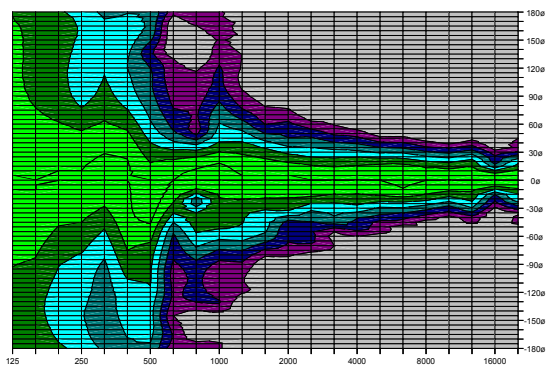

Flying Bracket



for F 8 / TSM 15 / A 8,
incl. screws
(per unit: 2 pcs. M10 x 30 adjustable
handle screws with axial bearing)
Order No. **01217/set**

Flying Bracket



for F 8
horizontal alignment, incl. screws
(per unit: 2 pcs. adapters, M10 hex
lock nuts, flat- and rubber washers)
Order No. **01217/F8/H**

Handle Screw



for flying brackets,
axial bearing
M10 x 30
Order No. **08374**

Ergostyle Lobe Knob



for flying brackets,
M10 x20, with grip, adjustable
Order No. **08171**

Flange



for flying brackets,
35 mm Ø → M10,
Order No. **08126**

Rubber Washer



for flying brackets,
40 mm
Order No. **01205**

Doughty Trigger Clamp



for flying bracket,
SWL 200 kg
Order No. **01222**

Steel Safety Cable



4 mm - 50 cm
Order No. **01376**

Chain Fastener



VBS 7 mm
Order No. **01378**

TV Spigot



10 mm internal thread,
28 mm Ø
Order No. **08128**

Ring Screw



M8– DIN 580, black zincod
Order No. **73600**
M10– DIN 580, black zincod
Order No. **73700**



Flying Bracket.

ACCESSORIES F 8

Wall Mount



for U-brackets, 40 kg max.,
incl. screws (M10 x 70 mm socket
head screw, M10 hex lock nut and flat
washer)

for 15" speakers
Order No. **08130/F400**

Wall Mount



with tilt unit, 40 kg max.
Order No. **08130**

Speaker Stand



Incl. wind up, 50 kg max.,
height 129 to 204 cm, K&M

Order No. **03011**

50 kg max., K&M

Order No. **03010**